



intAct Traktion-Power PzS

Low-maintenance lead-acid battery with armoured plates | wet charged

Art.No.

12TP180

Volt	12V
Capacity	180 AH (c5), 240 AH (c20)
CCR -18°C (EN)	-
Electrolyte	diluted sulphuric acid
Electrolyte density	1,28 +/- 0,01 Kg/l (25° C)
Size (LxWxH)	518 x 276 x 242 mm
Weight	69 kg
Pos. of Terminal	4
Terminal	1
Base plate	-


Usage

For heavy cyclical use


Given that the active material is armoured in tubes here, it can withstand the strongest cycles and exposure to shaking. An economical alternative, which also provides a permanently stable voltage due to its larger surface area. Our recommendation for all those who are looking for a particularly long-lasting battery to reliably power hobby applications.

- » **For heavy cyclical use.** 1,000 cycles according to IEC 254-1.
- » **Higher storage capacity** with the same battery size compared to grid-plate batteries.
- » **Tubular plate technology:** Robust and sophisticated for the heaviest loads.
- » **Particularly vibration-resistant.** Tubes protect the active material like a shield.
- » **Long service-life.** Durable, safe and reliable.
- » 6-volt and 12-volt versions.


Size



Pos. of Terminal 4



Terminal 1

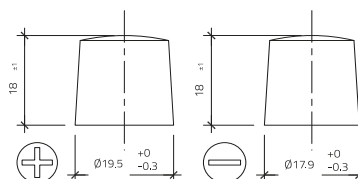

Base plate -

As of 06.11.2024